




Cladding Bricks Platinum Cladding

Terracotta Red

Code

CP-1

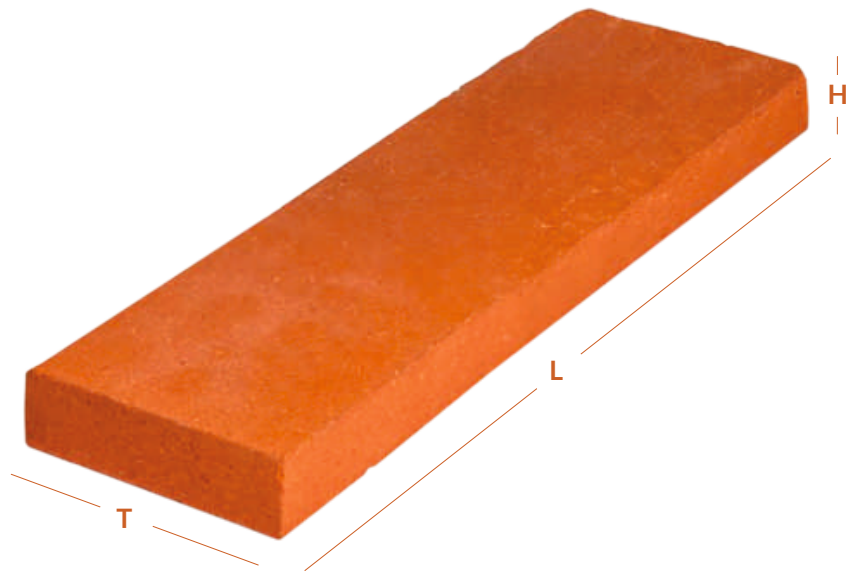

Specifications

Length	Thickness (T)	Height	Water Absorption
245 mm	18 mm	70 mm	< 12%

Cladding clay is collected from the hard rock mountains which is crushed under a particular process to get the desired result. Its extensive double pressure process make more durable with excess strength and less than 7% water absorber. It is architect and engineers preferred choice for the interior & external walls of a building and so are generally chosen for their aesthetic qualities.

Features

- Antique Colour Variance
- Excellent Length
- Acoustic Performance
- Earthquake Resistance
- Royal Look
- High Strength
- Fire Resistance
- Cost Effective
- No Maintenance
- Excellent bonding with mortar / adhesive

